




PC 53



Optional **AIR FILTER SYSTEM** for plasma inverter cutting units

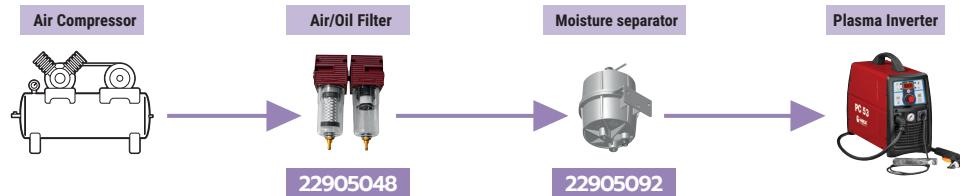

	PC 53
	PT 80
	(1ph) 230V 50/60Hz
	6,9 KVA
Max input current	30 A
	350 V
Range	20 ÷ 45 A
	60% 45 A
	25cm/min
	Max
	Severance
	4 - 5,5 bar
	100 l/min
	H
	IP22S
	440x195x395 mm
	685x290x485 mm
	20 / 18,8 kg
Code	99830025



EN 60974-1
EN 50192
EN 60974-10



Line Voltage Compensation
- + %



ENG • Plasma cutter, based on Inverter technology, guarantees accurate and clean plasma cut. Easy to handle and operate, this system is suitable for cutting materials at high speed. The front panel is provided with clear and simple graphics for the adjustment of the cutting current and to indicate the intervention of any of the internal safety devices.

IT • Plasma realizzato con tecnologia inverter garantisce un taglio al Plasma preciso e pulito. Maneggevole e facile da usare, è adatto per tutti i lavori di taglio ad alta velocità anche su spessori elevati. Il pannello frontale presenta una grafica semplice ed immediata per la regolazione della corrente di taglio, e per la segnalazione dell'intervento di tutte le sicurezze interne.

ACCESSORIES INCLUDED

Plasma torch PT 80 • 6,0 meters • Fix connect.

Ground cable • 10 mm² • 4,0 meters

EXTRA ACCESSORIES

21905073	Adjustable face shield • 2 sensors
21905075	Adjustable face shield • 4 sensors
21905086	HD welding gloves for MIG/MMA welding
22905092	Moisture separator
22905093K	Filter cartridge
22905048	Air/Oil filter