

FOX 165 MIG/MMA



INCLUDED

- 23000132 · MIG Torch · 10mm² · 2,7 m
- 43210167 · Ground cable · 16mm² · 2 m
- 21910116 · Flux Core welding wire reel
0,5 kg · Ø 0,9 mm
- 33805074 · Drive rolls · Knurled groove
Ø 25 mm · 0,6 - 0,8 mm



OPTIONAL



- 99900195 · Trolley
- 99900258 · HD AIR Trolley



FOX 165	
Input voltage	(1ph) 230V 50/60Hz
Power 60%	1,9 KVA
	MMA
U ₀	54 V
Amp. Min-Max	20 ÷ 150 A
Duty Cycle 40°C	100A @ 40% 65A @ 100%
	MIG
U ₀	24 V
Amp. Min-Max	25 ÷ 150 A
Duty Cycle 40°C	150A @ 25% 75A @ 100%
Steel	0,6 ÷ 1,0 Ø mm
Stainless Steel	0,8 ÷ 1,0 Ø mm
Flux Core	0,9 Ø mm
Brazing	0,8 ÷ 1,0 Ø mm
Ø Electrode	1,6 ÷ 3,25 Ø mm
Electrode Type	6013 - 7018 - CrNi
Insulation	H
Protec. Degree	IP22S
Dimens. (LxWxH)	480x220x385 mm
Box (LxWxH)	685x275x450 mm
Weight box/net	12,0 / 10,5 Kg
Code	99820050

Fox

MULTIPROCESS INVERTERS

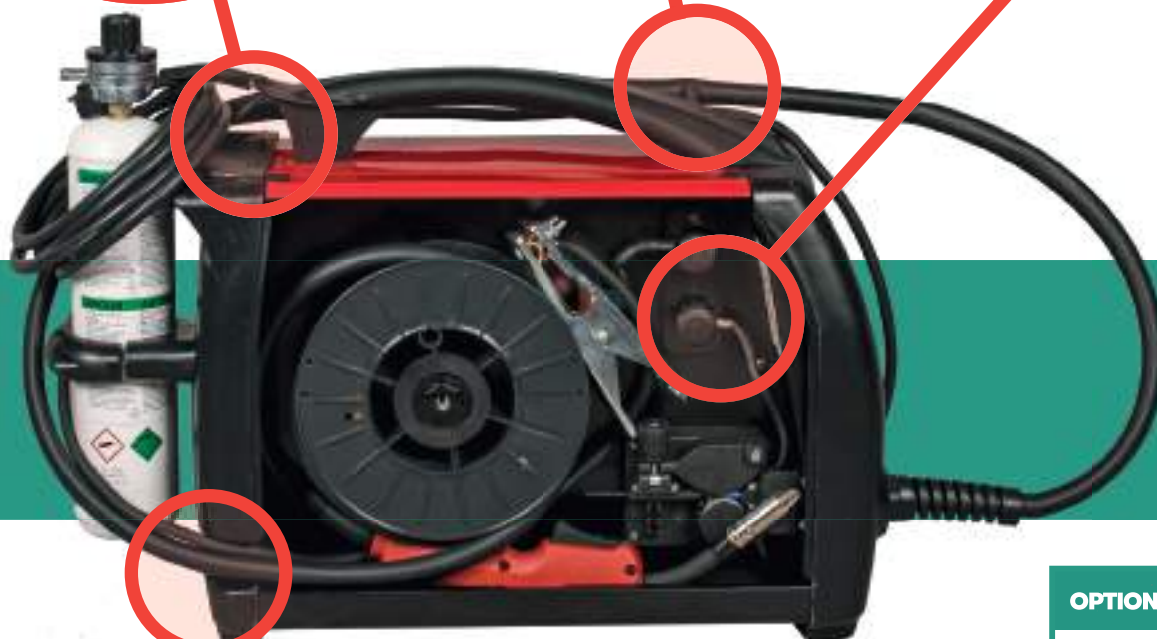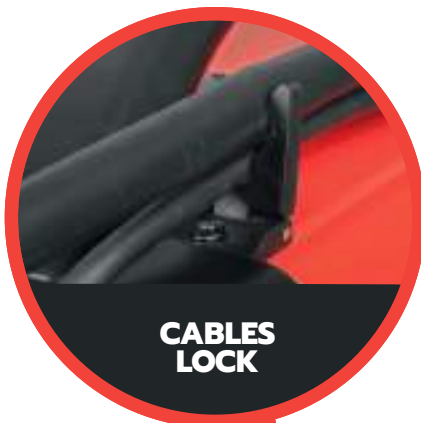

OPTIONAL "FULL GAS"

Trolley
99900195

OPTIONAL "EASY GAS"

Gas regulator	
22905001	
Disposable Gas cylinders	
Plastic Support	
04600404	