


FOX 165

FEATURES

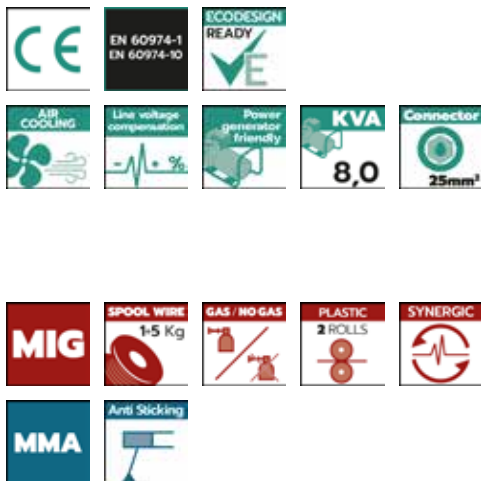

TECHNICAL DATA

Input Voltage	
Power 60%	
U _o	
Amp. min-max	
Duty Cycle 40°C	
Steel	
Flux Core	
Ø Electrode	
Electrode type	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Box (LxWxH)	
Weight box/net	

FOX 165

(1ph) 230V ± 10% · 50/60Hz	
1,9 KW	
MIG	MMA
70 V	70 V
25 ÷ 150 A	20 ÷ 150 A
150A @ 25% 95A @ 60% 75A @ 100%	150A @ 20% 85A @ 60% 65A @ 100%
0,8 Ø mm	-
0,9 Ø mm	-
-	1,6 ÷ 3,25 Ø mm
-	6013 - 7018 - CrNi
H	
IP22S	
220x480x385 mm	
260x590x435 mm	
12,0 / 10,5 Kg	

STANDARD CONFIGURATION

Part number	Description	
99820050	FOX 165	
23000132	MIG torch · fixed · 10mm ² · 2,7 m	INCLUDED
43210229	Ground cable · 16mm ² · 2,0 m	
21910116	Flux core wire spool · 0,5 Kg · Ø 0,9 mm	
30900030	Gas hose KIT · 2,0 m	
33805074	Drive roll · Ø 25 mm · 0,6 ÷ 0,8/0,9 mm · Knurled	

OPTIONAL

Part number	Description
99900171A	Trolley
43205028K	MMA welding cable · 16mm ² · 3,0 m