

FOX 189 MIG/MMA



INCLUDED

- 23000424 · MIG torch 15 AK · 3 m
- 43210138 · Ground cable · 16mm² · 2 m
- 21910116 · Flux Core welding wire reel
0,5 kg · Ø 0,9 mm
- 33805001 · Drive roll Ø 30mm · 0,6 - 0,8 mm
Knurled groove



OPTIONAL




- 43205028K · MMA Welding cable · 16mm² · 3 m
- 99900195 · Trolley
- 99900258 · HD AIR Trolley



FOX 189	
Input voltage	(1ph) 230V 50/60Hz
Power 60%	1,9 KVA
	MMA MIG
U _o	54 V 24 V
Amp. Min-Max	20 ÷ 180 A 25 ÷ 180 A
Duty Cycle 40°C	180A @ 20% 75A @ 100% 180A @ 20% 75A @ 100%
Steel	0,6 ÷ 1,0 Ø mm
Stainless Steel	0,8 ÷ 1,0 Ø mm
Flux Core	0,9 Ø mm
Aluminium	0,8 ÷ 1,0 Ø mm
Brazing	0,8 ÷ 1,0 Ø mm
Ø Electrode	1,6 ÷ 4,0 Ø mm
Electrode Type	6013 - 7018 - CrNi
Insulation	H
Protec. Degree	IP22S
Dimens. (LxWxH)	480x220x385 mm
Box (LxWxH)	685x275x450 mm
Weight box/net	12,5 / 10,5 Kg
Code	99820051

Fox

MULTIPROCESS INVERTERS

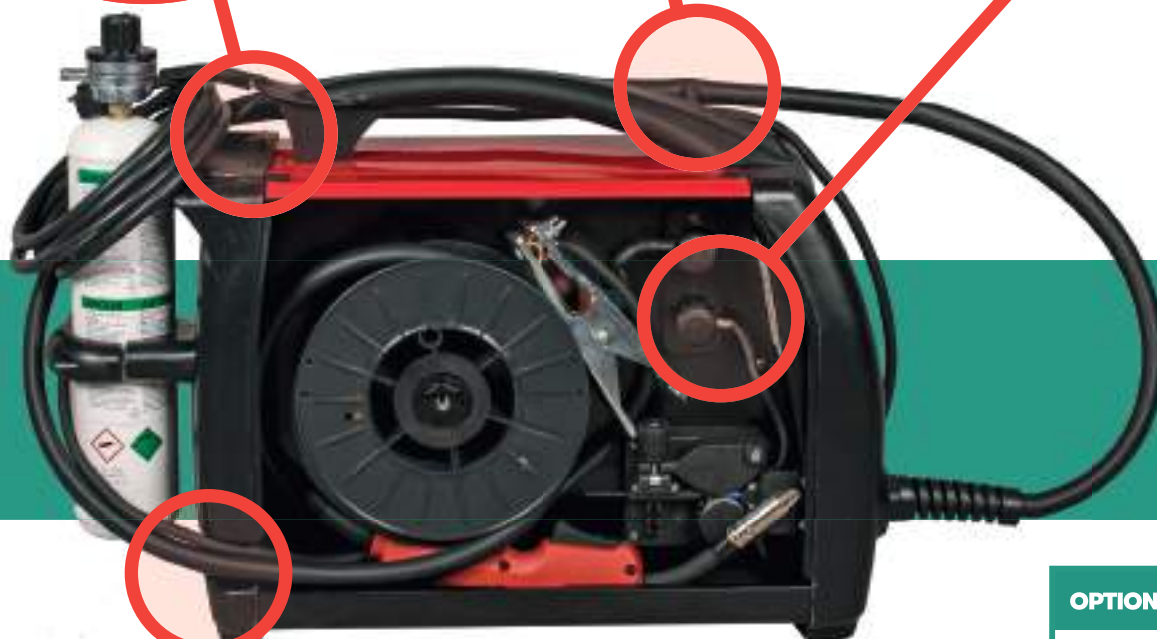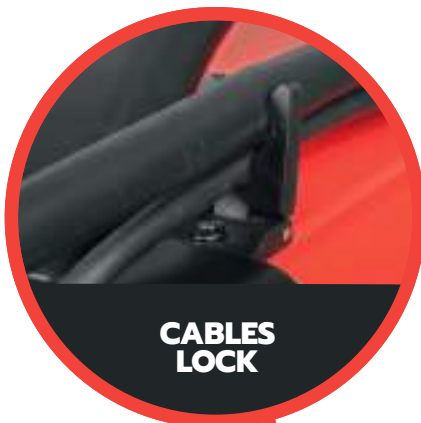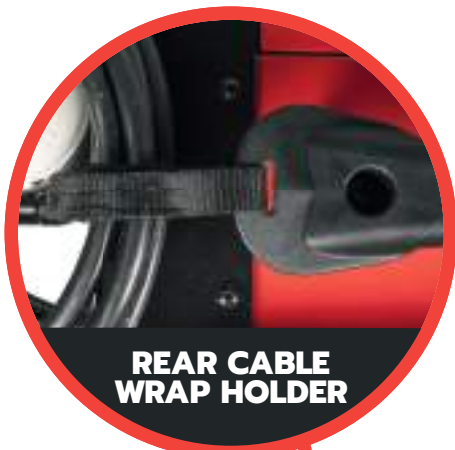

OPTIONAL "FULL GAS"

Trolley
99900195

OPTIONAL "EASY GAS"

Gas regulator	
22905001	
Disposable Gas cylinders	
Plastic Support	
04600404	