


FOX 191



FEATURES

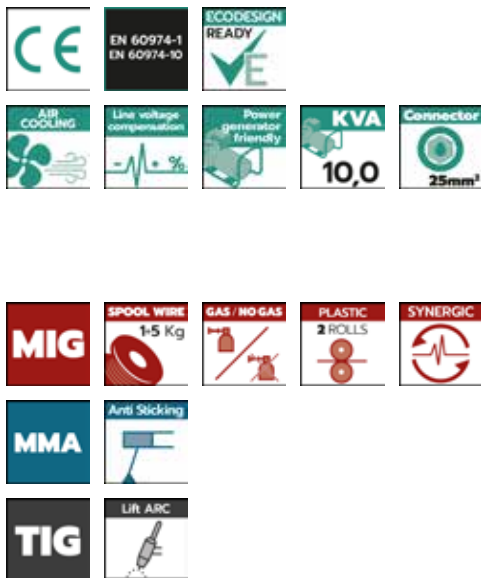

TECHNICAL DATA

Input Voltage
Power 60%
U_o
Amp. min-max
Duty Cycle 40°C
Steel
Stainless steel
Aluminium
Flux Core
Ø Electrode
Electrode type
Insulation
Protection degree
Dimens. (LxWxH)
Box (LxWxH)
Weight box/net

FOX 191

(1ph) 230V ± 10% · 50/60Hz		
MIG	MMA	TIG
2,4 KW	2,8 KW	2,2 KW
70 V	70 V	70 V
25 ÷ 180 A	20 ÷ 180 A	5 ÷ 180 A
180A @ 20% 105A @ 60% 75A @ 100%	180A @ 20% 105A @ 60% 75A @ 100%	180A 20% 105A 60% 75A 100%
0,6 ÷ 1,0 Ø mm	-	-
0,8 ÷ 1,0 Ø mm	-	-
0,8 ÷ 1,0 Ø mm	-	-
0,9 Ø mm	-	-
-	1,6 ÷ 4,0 Ø mm	-
-	6013 - 7018 - CrNi	-
H		
IP22S		
220x480x385 mm		
260x590x435 mm		
12,5 / 10,5 Kg		

STANDARD CONFIGURATION

Part number	Description	
99820039A	FOX 191	INCLUDED
23000491	MIG torch 15 · Euro connection · 3,0 m	
43210138	Ground cable · 16mm ² · 2,0 m	
21910116	Flux Core wire spool · 0,5 Kg · Ø 0,9 mm	
30900030	Gas hose KIT · 2,0 m	
33805023	Drive roll · Ø 30 mm · 0,6 ÷ 0,8/0,9 mm	

OPTIONAL

Part number	Description
99900171A	Trolley
43205028K	MMA welding cable · 16mm ² · 3,0 m