


COMPACT EVO 280 AC/DC



FEATURES

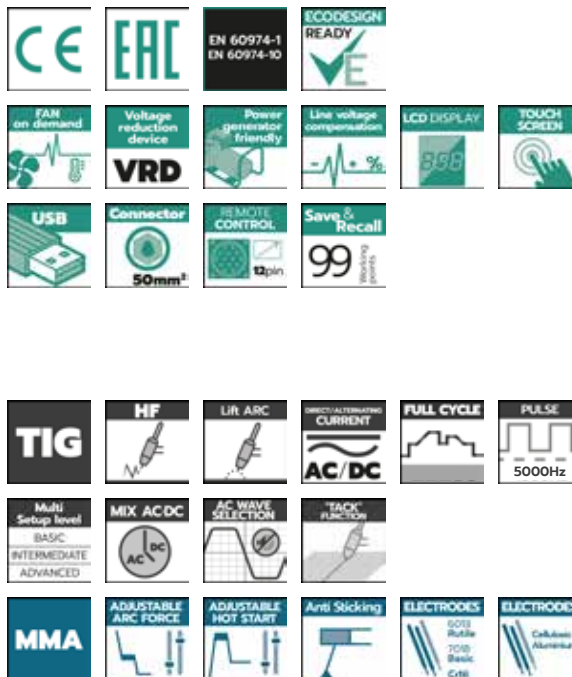

TECHNICAL DATA

Input Voltage	
Power 60%	
U _o	
Amp. min-max	
Duty Cycle 40°C	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Weight box/net	

COMPACT EVO 280 AC/DC

(3ph) · 400V ± 10% · 50/60 Hz	
TIG	MMA
9,2 KVA	9,2 KVA
55 V	55 V
5 ÷ 250 A	5 ÷ 250 A
250A @ 50% 230A @ 60% 200A @ 100%	250A @ 40% 210A @ 60% 190A @ 100%
H	
IP 22S	
255x530x460 mm	
33,5 / 32,0 Kg	

STANDARD CONFIGURATION

Part number	Description	
99815046KA	COMPACT EVO 280 AC/DC	
99815046A	Power source	INCLUDED
99490027KA	Cooler Unit SMART XL + tank CL 500 · 5 kg	
99900282	Trolley · 4 wheels ECO	