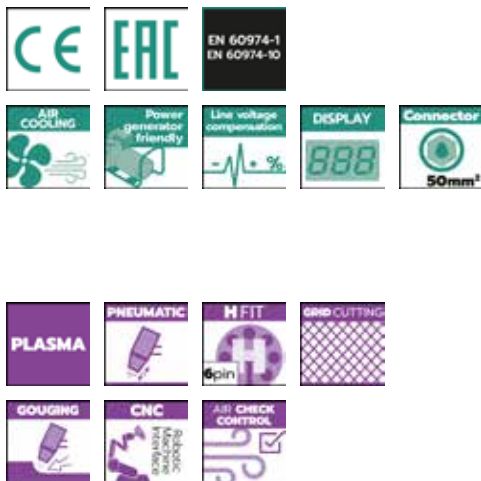


PC EVO 126

FEATURES

TECHNICAL DATA

| |
|-----------------------|
| Input Voltage |
| Power 60% |
| Max input current |
| U _o |
| Amp. min-max |
| Duty Cycle 40°C |
| Clean cut 25 cm/min |
| Max cut |
| Severance |
| Pierce |
| Required air capacity |
| Insulation |
| Protection degree |
| Dimens. (LxWxH) |
| Weight box/net |

PC EVO 126

| |
|----------------------------|
| (3ph) 400V ± 10% · 50/60Hz |
| 15 KVA |
| 22 A |
| 320 V |
| 20 ÷ 105 A |
| 105A @ 100% |
| 35 mm |
| 40 mm |
| 50 mm |
| 22 mm |
| 330 l/min @ 5,5 bar |
| H |
| IP 22S |
| 255x610x450 mm |
| 47,0 / 45,0 kg |

STANDARD CONFIGURATION

| Part number | Description |
|-------------|---------------------|
| 99835032K | PC EVO 126 + EP 126 |