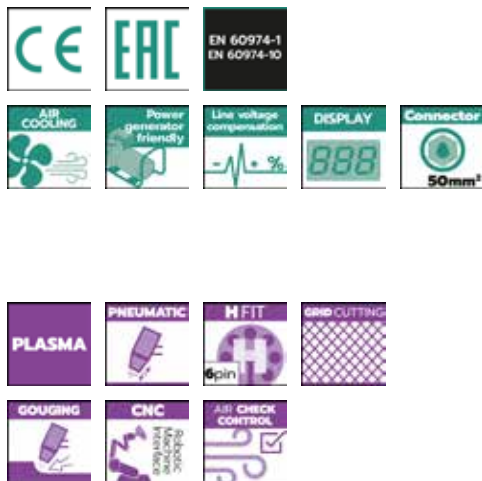


**PC EVO 70**

**FEATURES**

**TECHNICAL DATA**

Input Voltage
Power 60%
Max input current
U <sub>o</sub>
Amp. min-max
Duty Cycle 40°C
Clean cut 25 cm/min
Max cut
Severance
Pierce
Required air capacity
Insulation
Protection degree
Dimens. (LxWxH)
Weight box/net

**PC EVO 70**

(3ph) 400V ± 10% · 50/60Hz
8,9 KVA
22 A
330 V
20 ÷ 70 A
70 A @ 50%
65 A @ 60%
50 A @ 100%
25 mm
30 mm
35 mm
16 mm
220 l/min @ 5 bar
H
IP 22S
230x550x400 mm
23,6 / 20,4 kg

**STANDARD CONFIGURATION**

Part number	Description	
<b>99835042K</b>	<b>PC EVO 70 + EP 105</b>	
99835042	Power source · Ground cable · 10 mm <sup>2</sup> · 4 mt	
23010162	Plasma torch EP 105 · 6 mt · 6 Pins · H.FIT	*(no consumables)
23015563BH	Starter KIT EP 105 · 20-70 A	
		<b>INCLUDED</b>