


PC EVO 100



FEATURES

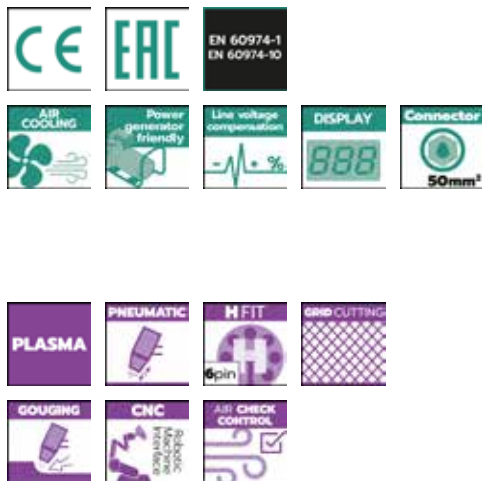

TECHNICAL DATA

Input Voltage
Power 60%
Max input current
U _o
Amp. min-max
Duty Cycle 40°C
Clean cut 25 cm/min
Max cut
Severance
Pierce
Required air capacity
Insulation
Protection degree
Dimens. (LxWxH)
Weight box/net

PC EVO 100

(3ph) 400V ± 10% · 50/60Hz
14,2 KVA
22 A
320 V
20 ÷ 100 A
100A @ 35%
70A @ 60%
60A @ 100%
35 mm
40 mm
50 mm
20 mm
220 l/min @ 5 bar
H
IP 22S
230x550x400 mm
27,2 / 24,0 kg

STANDARD CONFIGURATION

Part number	Description	
99835043K	PC EVO 100 + EP 105	
99835043	Power source · Ground cable · 10 mm ² · 4 mt	* (no consumables)
23010162	Plasma torch EP 105 · 6 mt · 6 Pins · H.FIT	
23015564BH	Starter KIT EP 105 · 85-105 A	
		INCLUDED