


# UNITECH EVO 418 · Air



## FEATURES

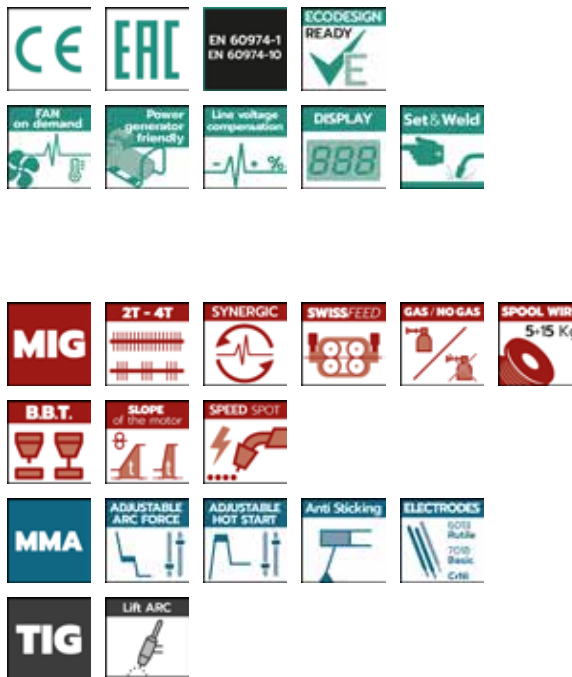

## TECHNICAL DATA

Input Voltage
Power 60%
U <sub>o</sub>
Amp. min-max
Duty Cycle 40°C
Insulation
Protection degree
Dimens. (LxWxH)
Weight box/net

## UNITECH EVO 418 · Air

(3ph) 400V ± 10% · 50/60Hz		
MIG	MMA	TIG
14,9 KVA	12,5 KVA	9,8 KVA
45 V	60 V	12 V
30 ÷ 400A	20 ÷ 350 A	10 ÷ 350 A
400A @ 60% 310A @ 100%	350A @ 60% 310A @ 100%	350A @ 60% 310A @ 100%
H		
IP 23S		
Power source 250x610x440 mm		
Wire feeder 240x560x460 mm		
Lifter 250x600x230 mm		
Trolley 460x1000x800 mm		
86,0 / 80,0 kg		

## STANDARD CONFIGURATION

Part number	Description	
99855014KA	UNITECH EVO 418 + X4 SYNERGIC · Air	
99850009A	Power source	INCLUDED
99420079A	Wire feeder X4 · H <sub>2</sub> O	
99900286	Wheels KIT X4 / H4 / XP4	
99490031	Lifetr KIT Trolley UNI · only Air	
44890397	Interconnection cable · 70 mm <sup>2</sup> · 5 mt · Air	
33805140	Pressure roll · Ø 37 mm · 1,0 - 1,2 mm · x2 · (red/orange) ●●	
33805145	Drive roll · Ø 37 mm · 1,0 - 1,2 mm · x2 · (red/orange) ●●	
99900282	Trolley · 4 wheels UNI	