


UNITECH EVO 558



FEATURES

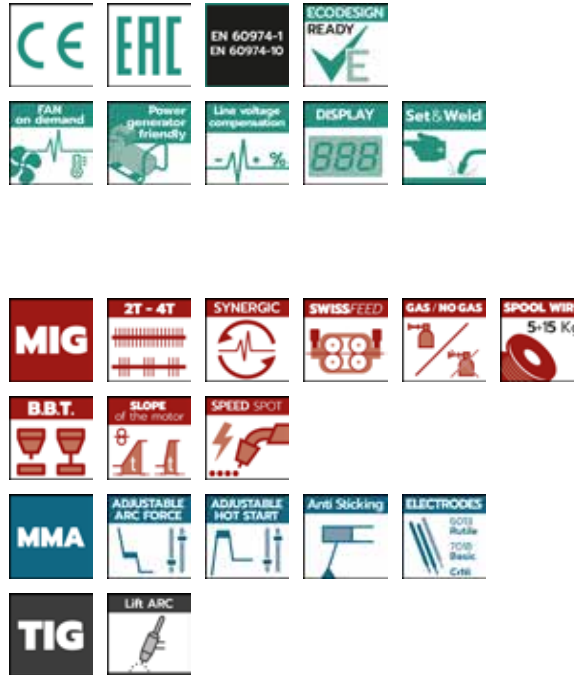

TECHNICAL DATA

| |
|-------------------|
| Input Voltage |
| Power 60% |
| U _o |
| Amp. min-max |
| Duty Cycle 40°C |
| Insulation |
| Protection degree |
| Dimens. (LxWxH) |
| Weight box/net |

UNITECH EVO 558

| (3ph) 400V ± 10% · 50/60Hz | | |
|---|---------------------------|---------------------------|
| MIG | MMA | TIG |
| 24,6 KVA | 21 KVA | 16,4 KVA |
| 45 V | 60 V | 12 V |
| 30 ÷ 550A | 20 ÷ 500 A | 10 ÷ 500 A |
| 550A @ 45% 500A @ 60% 400A @ 100% | 500A @ 60% 400A @ 100% | 500A @ 60% 400A @ 100% |
| H | | |
| IP 23S | | |
| | Power source | 250x610x440 mm |
| | Wire feeder | 240x560x460 mm |
| | Lifter | 250x600x230 mm |
| | Trolley | 460x1000x800 mm |
| 91 / 85,0 kg | | |

STANDARD CONFIGURATION

| Part number | Description | |
|-------------|--|----------|
| 99855012KA | UNITECH EVO 558 + X4 SYNERGIC · H ₂ O | |
| 99850008A | Power source | INCLUDED |
| 99420079A | Wire feeder X4 · H ₂ O | |
| 99900286 | Wheels KIT X4 / H4 / XP4 | |
| 99490030KA | Cooler unit SMART XL + tank CL 500 · 5 kg | |
| 44890386A | Interconnection cable · 70 mm ² · 5 mt · H ₂ O | |
| 33805140 | Pressure roll · Ø 37 mm · 1,0 - 1,2 mm · x2 · (red/orange) ●● | |
| 33805145 | Drive roll · Ø 37 mm · 1,0 - 1,2 mm · x2 · (red/orange) ●● | |
| 99900282 | Trolley · 4 wheels UNI | |