


MAXITECH EVO 506



FEATURES

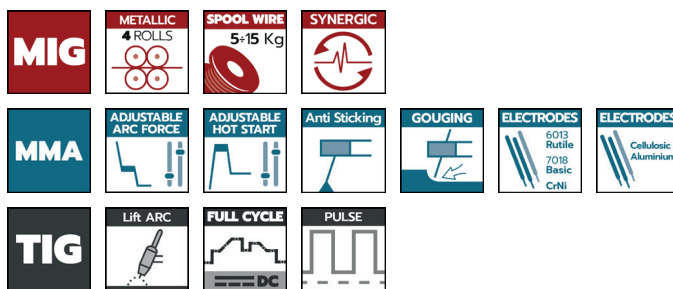

TECHNICAL DATA

Input Voltage	(3ph) 400V ± 10% · 50/60Hz
Power 60%	23,3 KVA
U _o	82 V
Amp. min-max	30 + 500A
Duty Cycle 40°C	500A @ 60% 400A @ 100%
Insulation	H
Protection degree	IP 23S
Dimens. (LxWxH)	Power source 320x650x500 mm Wire feeder 270x580x460 mm Cooler unit 315x630x235 mm Trolley 520x1050x1065 mm
Weight box/net	139,6 / 131,0 kg

MAXITECH EVO 506

	MIG	MMA	TIG
U _o	82 V	82 V	12 V
Amp. min-max	30 + 500A	10 + 500 A	5 + 500 A
Duty Cycle 40°C	500A @ 60% 400A @ 100%	500A @ 60% 400A @ 100%	500A @ 60% 400A @ 100%
Insulation	H		
Protection degree	IP 23S		
Dimens. (LxWxH)	Power source 320x650x500 mm Wire feeder 270x580x460 mm Cooler unit 315x630x235 mm Trolley 520x1050x1065 mm		
Weight box/net	139,6 / 131,0 kg		

STANDARD CONFIGURATION

Part number	Description	
99855038K	MAXITECH EVO 506 · Interconnection cable 5 mt	
99850004A	Power source	INCLUDED
04600452	Software expansion card · Pulse + Double pulse	
04600492	Enablement card · Up-Down torches · Analogic/Digital signal	
99420067A	Wire feeder F4W · wheels included · H ₂ O	
99490024KA	Cooler unit XL + tank CL 500 · 5 kg	
44890342	Interconnection cable · 70 mm ² · 5 mt · H ₂ O	
33805047	Drive roll · Ø 38 mm · 0,8 - 1,0 mm	
33805048	Drive roll · Ø 38 mm · 1,2 - 1,6 mm	
99900201	Trolley · 4 wheels HD	
99855039K	MAXITECH EVO 506 · Interconnection cable 10 mt	
99850004A	Power source	INCLUDED
04600452	Software expansion card · Pulse + Double pulse	
04600492	Enablement card · Up-Down torches · Analogic/Digital signal	
99420067A	Wire feeder F4W · wheels included · H ₂ O	
99490024KA	Cooler unit XL + tank CL 500 · 5 kg	
44890349	Interconnection cable · 70 mm ² · 10 mt · H ₂ O	
33805047	Drive roll · Ø 38 mm · 0,8 - 1,0 mm	
33805048	Drive roll · Ø 38 mm · 1,2 - 1,6 mm	
99900201	Trolley · 4 wheels HD	