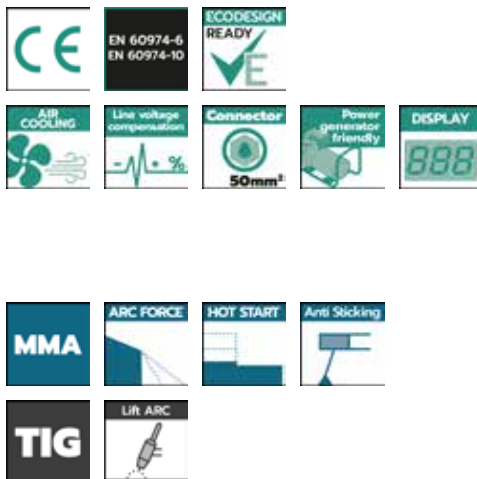


**JET 160**

**FEATURES**

**TECHNICAL DATA**

Input Voltage
Power 60%
U <sub>o</sub>
Amp. min-max
Duty Cycle 40°C
Ø Electrode
Electrode Type
Insulation
Protection degree
Dimens. (LxWxH)
Weight box/net

**JET 160**

(1ph) 230V ± 10% · 50/60Hz
6,4 KVA
70 V
10 ÷ 160 A
160A @ 35%
120A @ 60%
100A @ 100%
1,6 ÷ 4,0 mm
6013 - 7018
H
IP22S
140 x 370 x 280 mm
5,2 Kg

**STANDARD CONFIGURATION**

Part number	Description	
99806027	JET 160 · ANTI-SHOCK CASE KIT	160 x 400 x 475 mm · 10,0 Kg
-	Power source · JET 160	INCLUDED
43210257	Ground cable · 16 mm <sup>2</sup> · 2,0 m · connector 50 mm <sup>2</sup>	
43205129	Welding cable · 16 mm <sup>2</sup> · 3,0 m · connector 50 mm <sup>2</sup>	
21905039	Hammer-brush	
21690996	Anti-shock case	