


UNITECH EVO 328



FEATURES

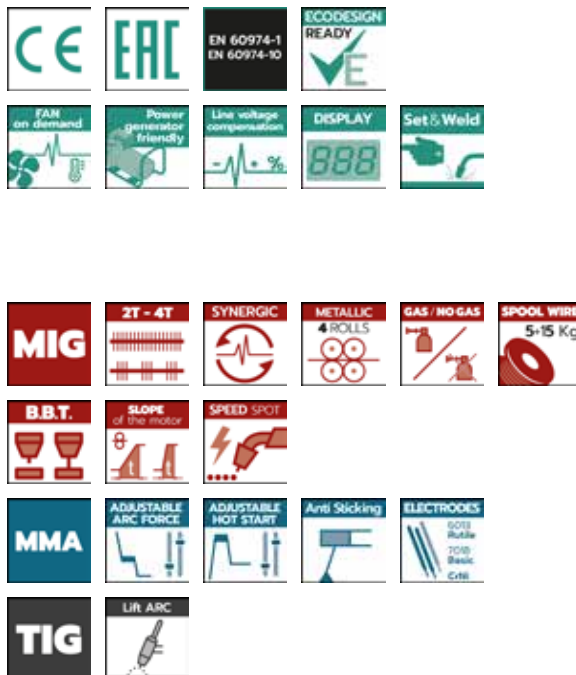

TECHNICAL DATA

Input Voltage

Power 60%

U_o

Amp. min-max

Duty Cycle 40°C

Insulation

Protection degree

Dimens. (LxWxH)

Weight box/net

UNITECH EVO 328

(3ph) 400V ± 10% • 50/60Hz

MIG	MMA	TIG
11,5 KVA	9,9 KVA	8,2 KVA
45 V	69,5 V	12 V
30 ÷ 320A	20 ÷ 270 A	10 ÷ 320 A
320A @ 40% 270A @ 60% 200A @ 100%	270A @ 45% 250A @ 60% 180A @ 100%	320A @ 45% 270A @ 60% 200A @ 100%
H		
IP 22S		
250x610x440 mm		
30,2 / 28,55 kg		

STANDARD CONFIGURATION

Part number	Description
99825011	UNITECH EVO 328
33805101	Drive roll · Ø 30 mm · 0,8 - 1,0 mm
	INCLUDED