


COMPACT EVO 280 AC/DC



FEATURES

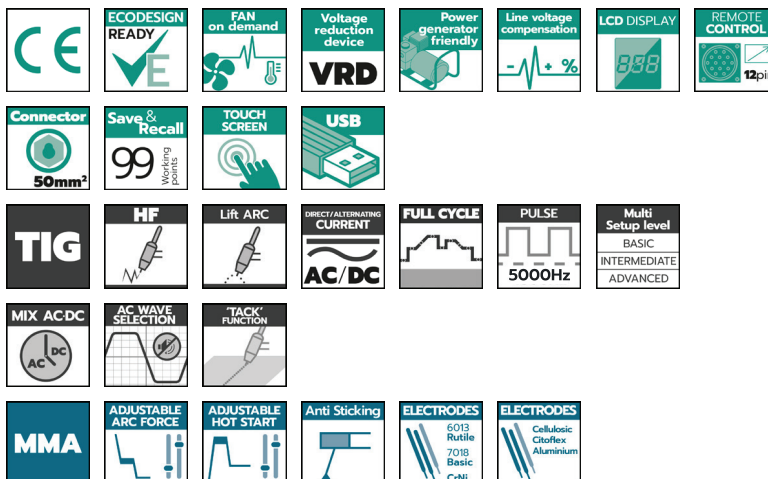

TECHNICAL DATA

Input Voltage
Power 60%
No load voltage U_0
Amp Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

COMPACT EVO 280 AC/DC

400V ± 10% · 50/60 Hz · (3ph)	
TIG	MMA
9,2 KVA	9,2 KVA
55 V	55 V
5 ÷ 250 A	5 ÷ 250 A
250A @ 50%	250A @ 40%
230A @ 60%	210A @ 60%
200A @ 100%	190A @ 100%
H	
IP 22S	
255x530x460 mm	
33,5 / 32,0 kg	

STANDARD CONFIGURATION

Part number	Description	
99815046KA	COMPACT EVO AC/DC 280 · H ₂ O	
99815046A	Power source	
99490034K	Cooler unit SMART XL + tank CL 500 · 5 kg	NEW
99900282	Trolley · 4 wheels UNI	INCLUDED