


PC EVO 126



FEATURES

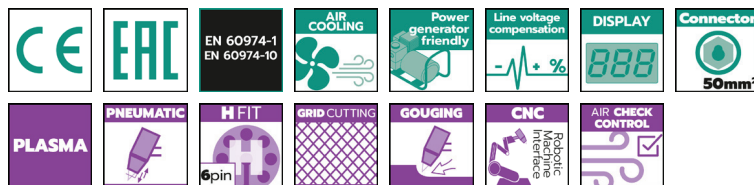

TECHNICAL DATA

Input Voltage
Power 60%
Max input current
No load voltage U_0
Amp Min-Max
Duty Cycle 40°
Clean cut 25 cm/min
Max cut
Severance
Pierce
Required air capacity
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

PC EVO 126

(3ph) · 400V 50/60 Hz
15 KVA
22 A
320 V
20 ÷ 105 A
105A @ 100%
35 mm
40 mm
50 mm
22 mm
330 l/min @ 5,5 bar
H
IP 22S
255x610x450 mm
47 / 45 kg

STANDARD CONFIGURATION

Part number	Description	
99835032KA	PC EVO 126 + EP 126	
99835032A	Power source · Ground cable · 25 mm² · 4 mt	INCLUDED
23010153	Plasma torch EP 126 · 6 mt · H.FIT	
23015473BH	Starter KIT EP 126 · 105A	