


PUMA 256



FEATURES

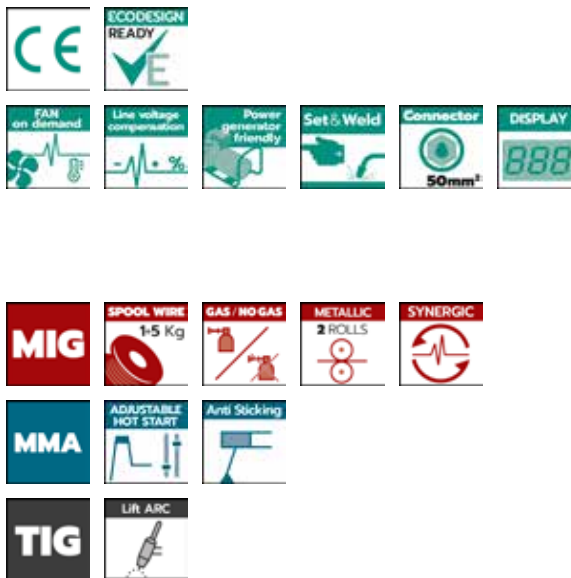

TECHNICAL DATA

Input Voltage
Power 60%
U _o
Amp. min-max
Duty Cycle 40°C
Steel
Stainless steel
Aluminium
Flux Core
CuSi ₃
Ø Electrode
Electrode type
Insulation
Protection degree
Dimens. (LxWxH)
Box (LxWxH)
Weight box/net

PUMA 256

(1ph) 230V ± 10% · 50/60Hz		
5,6 KW		
MIG	MMA	TIG
30 V	56 V	10 V
30 ÷ 250A	20 ÷ 200 A	10 ÷ 250 A
250A @ 30% 190A @ 60% 170A @ 100%	200A @ 30% 170A @ 60% 150A @ 100%	250A @ 30% 190A @ 60% 170A @ 100%
0,8 ÷ 1,0 Ø mm		
0,8 ÷ 1,0 Ø mm		
1,0 ÷ 1,2 Ø mm		
1,0 ÷ 1,2 Ø mm		
0,8 Ø mm		
1,6 ÷ 4 Ø mm		
6013 rutile - 7018 basic		
H		
IP23S		
450x840x710 mm		
365x895x650 mm		
32 / 30 Kg		

STANDARD CONFIGURATION

Part number	Description		
99820061	PUMA 256		
99820061K	PUMA 256 + KIT		
99820061	Power source · Puma 256		INCLUDED
23000494	ErgoPlus MIG 25 · Euro connection · 3,0 m		
43210253	Ground cable · 25mm² · 3,0 m		
33805101	Drive roll · Ø 30 mm · 0,8 ÷ 1,0 mm		
22905049	Pressure regulator · mini CO ₂ /Argon · 2 manometers		
22910014	Adaptor for gas bottle		

OPTIONAL

Part number	Description
23020199	TIG Torch · Tig 26V · 4 m