


PUMA 298



FEATURES

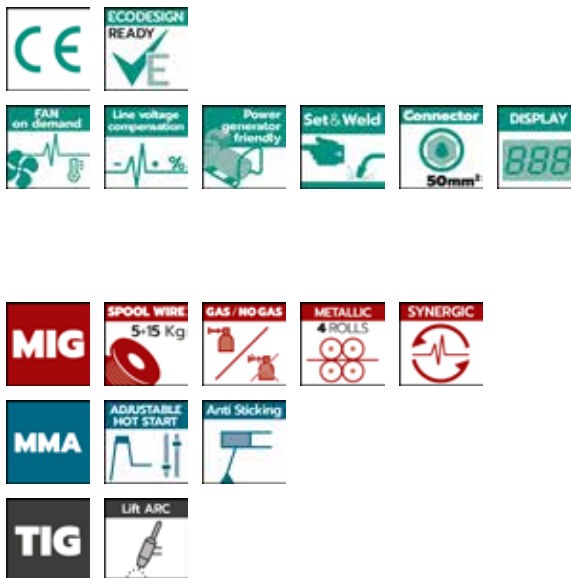

TECHNICAL DATA

Input Voltage
Power 60%
U _o
Amp. min-max
Duty Cycle 40°C
Steel
Stainless steel
Aluminium
Flux Core
CuSi ₃
Ø Electrode
Electrode type
Insulation
Protection degree
Dimens. (LxWxH)
Box (LxWxH)
Weight box/net

PUMA 298

(3ph) 400V ± 10% · 50/60Hz		
MIG	MMA (Rutile only)	TIG
6 KW	6 KW	5,8 KW
35 V	54 V	54 V
30 ÷ 290A	20 ÷ 250 A	10 ÷ 290 A
290A @ 35% 220A @ 60% 170A @ 100%	250A @ 35% 190A @ 60% 150A @ 100%	290A @ 35% 220A @ 60% 170A @ 100%
	0,8 ÷ 1,0 Ø mm	
	0,8 ÷ 1,0 Ø mm	
	1,0 ÷ 1,2 Ø mm	
	1,0 ÷ 1,2 Ø mm	
	0,8 Ø mm	
	1,6 ÷ 5 Ø mm	
	6013 rutile	
	H	
	IP23S	
	450x840x710 mm	
	365x895x650 mm	
	37 / 35 Kg	

STANDARD CONFIGURATION

Part number	Description
99825016	PUMA 298

998225016K	PUMA 298 + KIT	
99825016	Power source · Puma 298	INCLUDED
23000494	ErgoPlus MIG 25 · Euro connection · 3,0 m	
43210254	Ground cable · 35mm² · 3,0 m	
33805101	Drive roll · Ø 30 mm · 0,8 ÷ 1,0 mm	
22905049	Pressure regulator · mini CO ₂ /Argon · 2 manometers	
22910014	Adaptor for gas bottle	

OPTIONAL

Part number	Description
23020199	TIG torch Tig 26V · 4m