


COMPACT 200C EVO



FEATURES

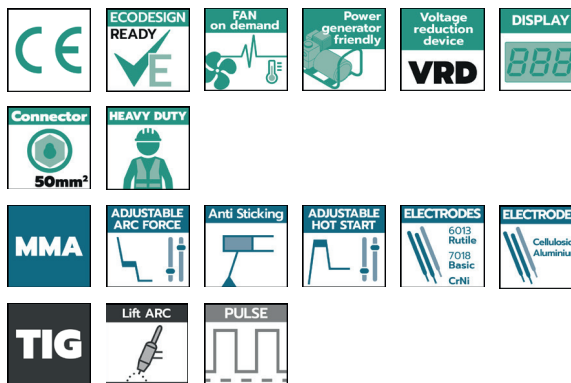

TECHNICAL DATA

Input Voltage
Power 60%
No load voltage U_0
Amp. Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

COMPACT 200C EVO	
230V ± 10% · 50/60 Hz · (1ph)	
MMA	TIG
6,9 KVA	6,9 KVA
98 ÷ 20 V	98 ÷ 20 V
5 ÷ 200 A	5 ÷ 200 A
200A @ 50%	200A @ 50%
130A @ 100%	130A @ 100%
H	
IP 23S	
140x370x280 mm	
7,00 kg	

STANDARD CONFIGURATION

Part number	Description
99806043	COMPACT 200C EVO
99806044	COMPACT 200C EVO + KIT BORSA
99806043	GPower source
21905178K	HELVI Bag M
43210170K	Ground cable with clamp · 25 mm ² · 2 mt · connector 50 mm ²
43205097	Welding cable with electrode holder · 25 mm ² · 3 mt · conn. 50 mm ²

CUSTOMIZED CONFIGURATION

○ MMA WELDING KIT

99900009	MMA Welding KIT · 35 mm ² · 5+3 mt · conn. 50 mm ²
99900022	MMA Welding KIT · 50 mm ² · 5+3 mt · conn. 50mm ²

○ GROUND CABLES

43210132K	Ground cable with clamp · 25 mm ² · 3 mt · conn. 50 mm ²
-----------	--

○ WELDING TORCHES

43205040K	Welding cable with electrode holder · 25 mm ² · 3mt · conn. 50 mm ²
23020199	TIG torch · TIG 26V · 4 mt · with gas valve · conn. 50 mm ² · Consumables KIT Ø 2,4 mm · Air