


UNITECH MMA EVO 368

FEATURES

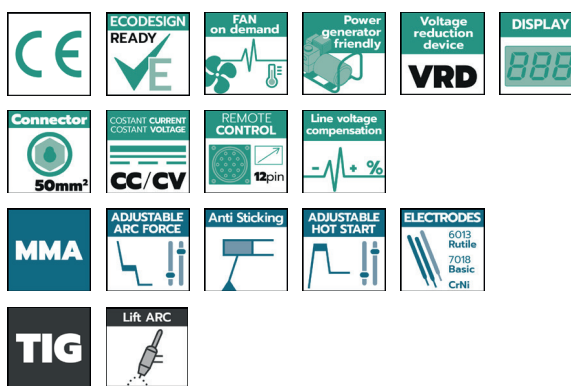

TECHNICAL DATA

Input Voltage
Power 60%
No load voltage U_0
Amp. Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

UNITECH MMA EVO 368

400V ± 10% · 50/60 Hz · (3ph)
MMA
10,3 KVA
70 V
20 ÷ 300 A
300A @ 50%
280A @ 60%
250A @ 100%
H
IP 23S
250x610x440 mm
29,6 / 28,0 kg

STANDARD CONFIGURATION

Part number	Description
99850010	UNITECH EVO 368

CUSTOMIZED CONFIGURATION

○ MMA WELDING KIT

99900022	MMA Welding KIT · 50 mm ² · 5+3 mt · conn. 50 mm ²
99900063	MMA Welding KIT · 70 mm ² · 5+3 mt · conn. 70 mm ²

○ GROUND CABLES

43210076K	Ground cable with clamp · 50 mm ² · 3 mt · conn. 50 mm ²
43210115K	Ground cable with clamp · 70 mm ² · 3 mt · conn. 70 mm ²
43210247K	Ground cable with C-clamp · 70 mm ² · 5 mt · conn. 95 mm ²

○ WELDING TORCHES

43205037K	Welding cable with electrode holder · 50 mm ² · 5 mt · conn. 50 mm ²
43205052K	Welding cable with electrode holder · 70 mm ² · 5 mt · conn. 70 mm ²
23020199	TIG torch · TIG 26V · 4 mt · with gas valve · conn. 50 mm ² · Consumables KIT Ø 2,4 mm · Air

○ TROLLEYS

99900171A	Trolley · 2 wheels + shelves ECO
99900258A	Trolley · 4 wheels + shelves HD *(no H₂O)