


UNITECH MMA EVO 558



FEATURES

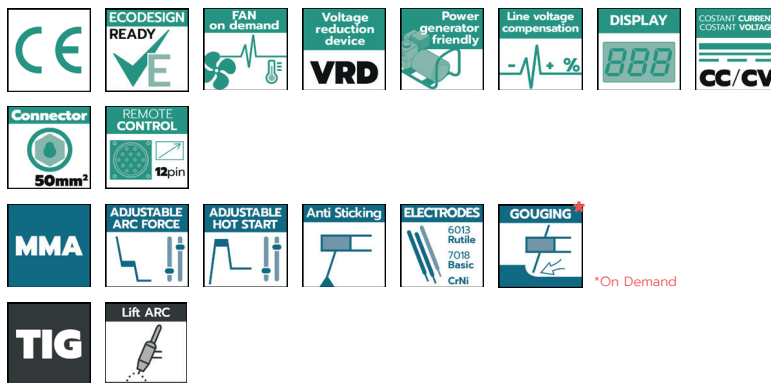

TECHNICAL DATA

| |
|-----------------------|
| Input Voltage |
| Power 60% |
| No load voltage U_0 |
| Amp. Min-Max |
| Duty Cycle 40° |
| Insulation class |
| Protection degree |
| Dimensions (LxWxH) |
| Weight box/net |

UNITECH MMA EVO 558

| |
|-------------------------------|
| 400V ± 10% · 50/60 Hz · (3ph) |
| MMA |
| 21 KVA |
| 60 V |
| 20 ÷ 500 A |
| 500A @ 60% |
| 400A @ 100% |
| H |
| IP 23S |
| 250x610x440 mm |
| 36,8 / 35,15 kg |

STANDARD CONFIGURATION

| | |
|-----------|-----------------|
| 99850008A | UNITECH EVO 558 |
|-----------|-----------------|

CUSTOMIZED CONFIGURATION

● MMA WELDING KIT

| | |
|----------|--|
| 99900022 | MMA Welding KIT · 50 mm ² · 5+3 mt · conn. 50 mm ² |
| 99900063 | MMA Welding KIT · 70 mm ² · 5+3 mt · conn. 70 mm ² |

● GROUND CABLES

| | |
|-----------|--|
| 43210076K | Ground cable with clamp · 50 mm ² · 3 mt · conn. 50 mm ² |
| 43210115K | Ground cable with clamp · 70 mm ² · 3 mt · conn. 70 mm ² |
| 43210247K | Ground cable with C-clamp · 70 mm ² · 5 mt · conn. 95 mm ² |

● WELDING TORCHES

| | |
|-----------|--|
| 43205037K | Welding cable with electrode holder · 50 mm ² · 5 mt · conn. 50 mm ² |
| 43205052K | Welding cable with electrode holder · 70 mm ² · 5 mt · conn. 70 mm ² |
| 23020176 | TIG Torch · EXPERTIG 26 · 4 mt · conn. 50 mm ² · 12 Pin · Air · Consumables KIT Ø 2,4 mm |

● TROLLEYS

| | |
|-----------|--|
| 99900171A | Trolley · 2 wheels + shelves ECO |
| 99900258A | Trolley · 4 wheels + shelves HD *(no H₂O) |