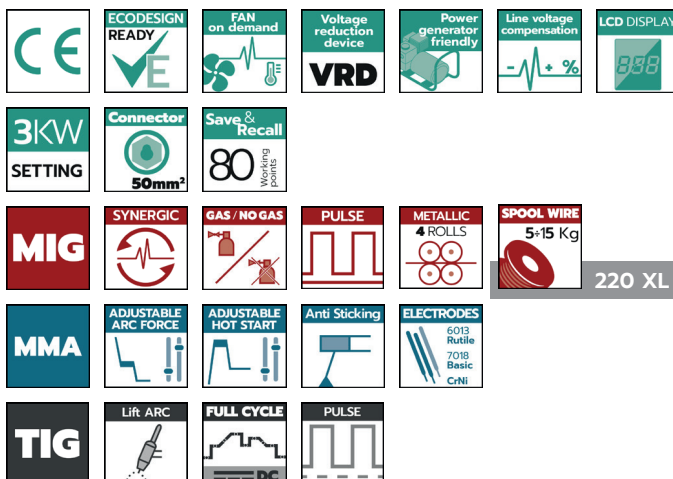


TP 220 XL
FEATURES

TECHNICAL DATA

Input Voltage
Power 60%
No load voltage U_0
Amp Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

TP 220 XL

(1ph) · 230V ± 10% · 50/60 Hz		
MIG	MMA	TIG
7 KVA	7 KVA	7 KVA
35 V	65 V	65 V
20 ÷ 200 A	5 ÷ 200 A	5 ÷ 200 A
200A @ 35%	200A @ 35%	200A @ 35%
140A @ 100%	120A @ 100%	120A @ 100%
H		
IP 22S		
255x600x460 mm		
29,6 / 25,4 Kg		

STANDARD CONFIGURATION

99820046KB	TP 220 XL PULSED
99820046B	Power source
43210132	Ground cable · 25 mm ² · 3 mt
43205098	Welding cable with electrode holder MMA · 16 mm ² · 3 mt
23000494	Torch ERGOPLUS 25 · 3 mt · Air
ALU KIT	· Contact tip · Ø 0,8 M8
	· Contact tip · Ø 1,0 M8
	· Swirl ring · M8
	· Wire liner · Ø 1,0 - 1,2 mm · 3,5 mt
	· Brass wire inlet tube · Ø 4,4 x 5 mm · L= 150 mm
22905090	Pressure regulator 2 gauges · mini ECO
22910014	Adaptor for gas bottle CO ₂ /Argon
33805003	Drive roll · Ø 30 mm · 0,6 - 0,8 mm
33805104	Drive roll for aluminium · Ø 30 mm · 0,8 - 1,0 mm