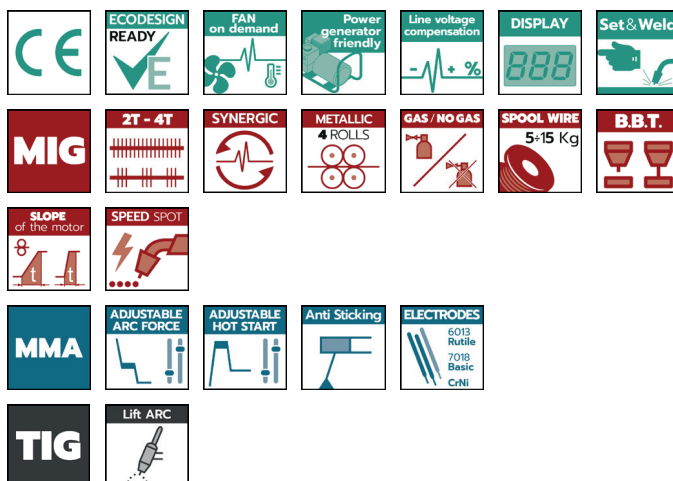


UNITECH EVO 328

CARATTERISTICHE

DATI TECNICI

Alimentazione	
Potenza 60%	
Tensione a vuoto U_0	
Amperaggio Min-Max	
Ciclo di lavoro 40°	
Classe di isolamento	
Grado di protezione	
Dimensioni (LxWxH)	
Peso lordo/netto	

UNITECH EVO 328

(3ph) · 400V ± 10% · 50/60 Hz		
MIG	MMA	TIG
11,5 KVA	9,9 KVA	8,2 KVA
45 V	69,5 V	12 V
30 ÷ 320 A	20 ÷ 270 A	10 ÷ 320 A
320A @ 40% 270A @ 60% 200A @ 100%	270A @ 45% 250A @ 60% 180A @ 100%	320A @ 45% 270A @ 60% 200A @ 100%
H		
IP 23S		
250x610x440 mm		
30,2 / 28,55 kg		

CONFIGURAZIONE STANDARD

Codice	Descrizione
99825011	UNITECH EVO 328
33805101	Rullino · Ø 30 mm · 0,8 - 1,0 mm