


# UNITECH EVO 368

## FEATURES

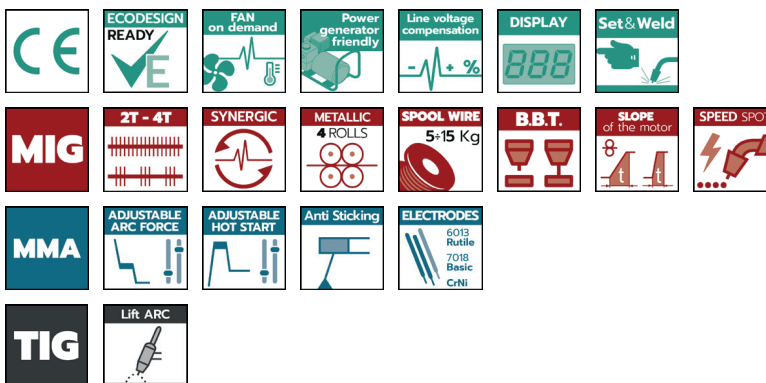

## TECHNICAL DATA

Input Voltage	
Power 60%	
No load voltage $U_0$	
Amp Min-Max	
Duty Cycle 40°	
Insulation class	
Protection degree	
Dimensions (LxWxH)	
Weight box/net	

## UNITECH EVO 368

(3ph) · 400V ± 10% · 50/60 Hz		
MIG	MMA	TIG
12,1 KVA	10,3 KVA	9,4 KVA
45 V	70 V	12 V
30 ÷ 350 A	20 ÷ 300 A	10 ÷ 350 A
350A @ 50%	300A @ 50%	350A @ 50%
320A @ 60%	280A @ 60%	320A @ 60%
250A @ 100%	250A @ 100%	250A @ 100%
H		
IP 23S		
Power source	250x610x440 mm	
Wire feeder	240x560x460 mm	
Lifter	250x600x230 mm	
Trolley	460x1000x800 mm	
	69,8 / 64,4 kg	

## STANDARD CONFIGURATION

Part number	Description
<b>99855019K</b>	<b>UNITECH EVO 368 + H4 MANUAL · Air · (Only MIG MANUAL mode)</b>
99850010	Power source
99420080	Wire feeder H4 · Air
99900286	Wheels KIT X4 / H4 / XP4
99490031	Lifetr KIT Trolley UNI · only Air
44890396	Interconnection cable · 50 mm <sup>2</sup> · 5 mt · Air
33805101	Drive roll · Ø 30 mm · 0,8 - 1,0 mm
99900282	Trolley · 4 wheels UNI