


UNITECH PULSE 360


NEW

MIG · LCD remote control Unitech Pulse

FEATURES

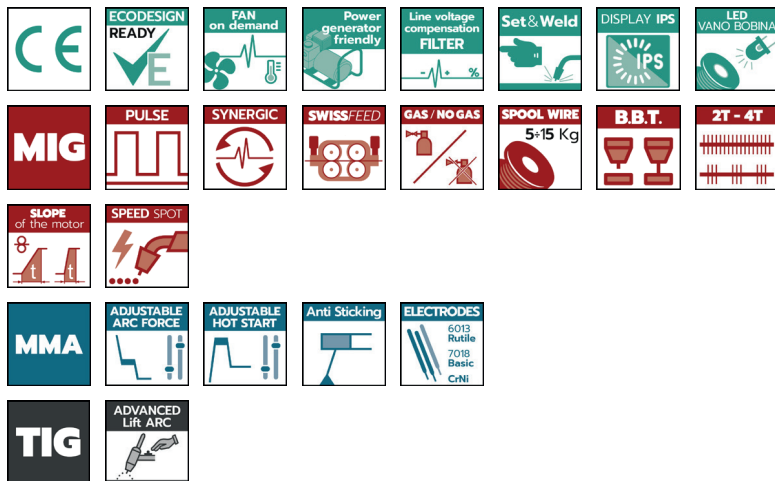

TECHNICAL DATA

Input Voltage
Power 60%
No load voltage U_0
Amp Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

UNITECH PULSE 360

(3ph) · 400V ± 10% · 50/60 Hz		
MIG	MMA	TIG
18,1 KVA	14 KVA	15,6 KVA
45 V	60 V	12 V
30 ÷ 350 A	20 ÷ 300 A	10 ÷ 350 A
350A @ 50% 320A @ 60% 280A @ 100%	300A @ 50% 280A @ 60% 350A @ 100%	350A @ 50% 320A @ 60% 280A @ 100%
H		
IP 23S		
	Power source	445x930x935 mm
	Wire feeder	240x570x460 mm
108,6 / 104,7 Kg		

STANDARD CONFIGURATION

Part number	Description
99855027K	UNITECH PULSE 360 + XP4 LCD · H ₂ O
99850013	Power source NO LCD · H ₂ O
99490035K	KIT Cooler unit UNITECH PULSE + tank CL 500 · 5 kg
99420081	Wire feeder XP4 LCD · H ₂ O
99900286	Wheels KIT X4 / H4 / XP4
44890342	Interconnection cable · 70 mm ² · 5 mt · H ₂ O
33805140	Pressure roll · Ø 37 mm · 1,0 - 1,2 mm · x2 · (red/orange)
33805145	Drive roll · Ø 37 mm · 1,0 - 1,2 mm · x2 · (red/orange)