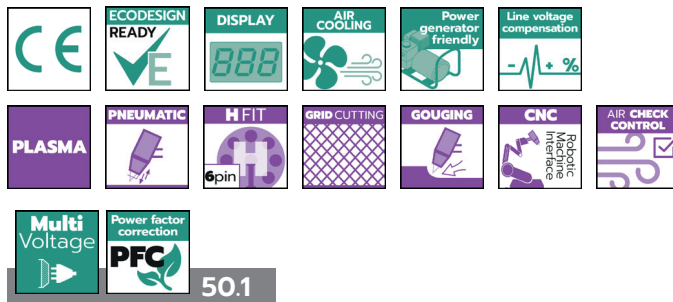


**PC EVO 50.1**

**FEATURES**

**TECHNICAL DATA**

Input Voltage
Power 60%
Max input current
No load voltage $U_0$
Amp Min-Max
Duty Cycle 40°
Recommended Quality Cut
Maximum Quality Cut
Severance Cut
Piercing Capacity
Required air capacity
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

**PC EVO 50.1**

(1ph) · 115V ± 10% 50/60 Hz	(1ph) · 230V ± 10% 50/60 Hz
2,5 KVA	5 KVA
26 A	25 A
270 V	270 V
20 ÷ 25 A	20 ÷ 45 A
25A @ 40% 20A @ 100%	45A @ 50% 32A @ 100%
8 mm	15 mm
11 mm	20 mm
12 mm	22 mm
12 mm	12 mm
220 l/min @ 5 bar	
H	
IP 22S	
195x495x395 mm	
20,1 / 19,1 kg	

**STANDARD CONFIGURATION**

Part number	Description
<b>99830032K</b>	<b>PC EVO 50.1</b>
99830031A	Power source · Ground cable · 10mm <sup>2</sup> · 4 mt
23010162	Plasma torch EP 105 · 6 mt · 6 Pin · H.FIT - no consumables
23015563BH	Starter Kit EP 105 · 20-70A