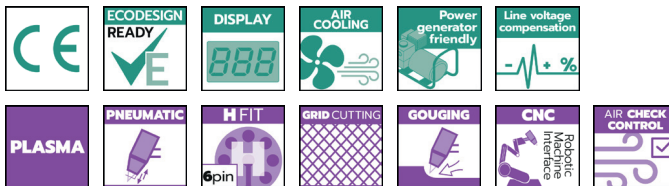


**PC EVO 50.3**

**FEATURES**

**TECHNICAL DATA**

Input Voltage
Power 60%
Max input current
No load voltage U <sub>0</sub>
Amp Min-Max
Duty Cycle 40°
Recommended Quality Cut
Maximum Quality Cut
Severance Cut
Piercing Capacity
Required air capacity
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

**PC EVO 50.3**

(3ph) · 400V ± 10% 50/60 Hz
7 KVA
14 A
240 V
20 ÷ 45 A
45A @ 50% 35A @ 100%
15 mm
20 mm
22 mm
12 mm
220 l/min @ 5 bar
H
IP 22S
195x495x395 mm
20,1 / 19,1 kg

**STANDARD CONFIGURATION**

Part number	Description
<b>99835044K</b>	<b>PC EVO 50.3</b>
99835040A	Power source · Ground cable · 10 mm <sup>2</sup> · 4 mt
23010162	Plasma torch EP 105 · 6 mt · 6 Pin · H.FIT - no consumables
23015563BH	Starter Kit EP 105 · 20-70A