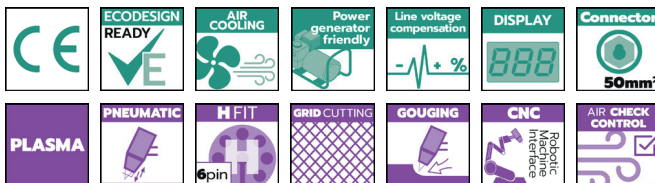


PC EVO 70

FEATURES

TECHNICAL DATA

Input Voltage
Power 60%
Max input current
No load voltage U ₀
Amp Min-Max
Duty Cycle 40°
Recommended Quality Cut
Maximum Quality Cut
Severance Cut
Piercing Capacity
Required air capacity
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

PC EVO 70

(3ph) · 400V 50/60 Hz
8,9 KVA
22 A
330 V
20 ÷ 70 A
70A @ 50% 65A @ 60% 50A @ 100%
25 mm
30 mm
35 mm
16 mm
220 l/min @ 5 bar
H
IP 22S
230x550x400 mm
23,6 / 20,4 kg

STANDARD CONFIGURATION

Part number	Description
99835042K	PC EVO 70 + EP 105
99835042	Power source · Ground cable · 10 mm ² · 4 mt
23010162	Plasma torch EP 105 · 6 mt · 6 Pin · H.FIT - no consumables
23015563BH	Starter Kit EP 105 · 20-70A