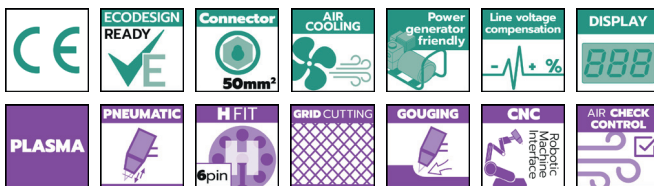


**PC EVO 126**

**FEATURES**

**TECHNICAL DATA**

Input Voltage	
Power 60%	
Max input current	
No load voltage U <sub>o</sub>	
Amp Min-Max	
Duty Cycle 40°	
Recommended Quality Cut	
Maximum Quality Cut	
Severance Cut	
Piercing Capacity	
Required air capacity	
Insulation class	
Protection degree	
Dimensions (LxWxH)	
Weight box/net	

**PC EVO 126**

(3ph) · 400V 50/60 Hz
15 KVA
22 A
320 V
20 ÷ 105 A
105A @ 100%
35 mm
40 mm
50 mm
22 mm
330 l/min @ 5,5 bar
H
IP 22S
255x610x450 mm
47 / 45 kg

**STANDARD CONFIGURATION**

Part number	Description
<b>99835032KA</b>	<b>PC EVO 126 + EP 126</b>
99835032A	Power source · Ground cable · 25 mm <sup>2</sup> · 4 mt
23010153	Plasma torch EP 126 · 6 mt · H.FIT
23015473BH	Starter KIT EP 126 · 105A