


COMPACT EVO 306C



FEATURES

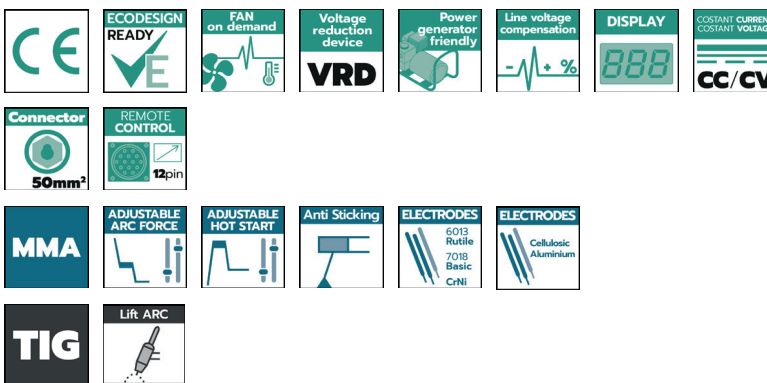

TECHNICAL DATA

Input Voltage
Power 60%
No load voltage U_0
Amp. Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

COMPACT EVO 306C

400V ± 10% · 50/60 Hz · (3ph)
MMA
10,3 KVA
75 V
5 ± 270 A
270A @ 60%
200A @ 100%
H
IP 22S
195x495x395 mm
20 / 18,8 kg

STANDARD CONFIGURATION

Part number	Description
99815042A	COMPACT EVO 306C

CUSTOMIZED CONFIGURATION

● MMA WELDING KIT

99900022	MMA Welding KIT · 50 mm ² · 5+3 mt · conn. 50 mm ²
99900063	MMA Welding KIT · 70 mm ² · 5+3 mt · conn. 70 mm ²

● GROUND CABLES

43210076K	Ground cable with clamp · 50 mm ² · 3 mt · conn. 50 mm ²
43210115K	Ground cable with clamp · 70 mm ² · 3 mt · conn. 70 mm ²
43210247K	Ground cable with C-clamp · 70 mm ² · 5 mt · conn. 95 mm ²

● WELDING TORCHES

43205037K	Welding cable with electrode holder · 50 mm ² · 5 mt · conn. 50 mm ²
43205052K	Welding cable with electrode holder · 70 mm ² · 5 mt · conn. 70 mm ²
23020176	TIG Torch · EXPERTIG 26 · 4 mt · conn. 50 mm ² · 12 Pin · Air · Consumables KIT Ø 2,4 mm

● REMOTE CONTROL

99810020	Manual remote control · 12 pin · 10 mt	x MMA
----------	--	-------

● TROLLEYS

99900171A	Trolley · 2 wheels + shelves ECO	
99900258A	Trolley · 4 wheels + shelves HD	*(no H ₂ O)