


COMPACT EVO 306HF



FEATURES

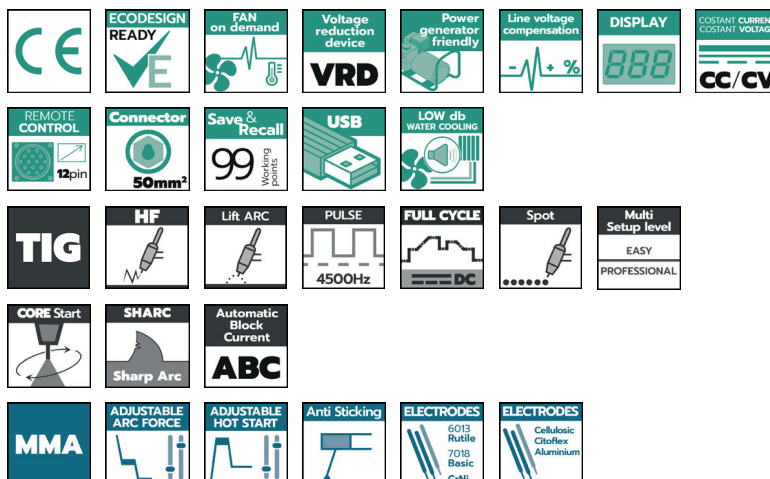

TECHNICAL DATA

Input Voltage
Power 60%
No load voltage U_0
Amp Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

COMPACT EVO 306HF

400V ± 10% · 50/60 Hz · (3ph)	
TIG	MMA
8,5 KVA	10,1 KVA
10 V	75 V
5 ÷ 300 A	5 ÷ 270 A
300A @ 50%	270A @ 60%
210A @ 100%	200A @ 100%
H	
IP 22S	
255x530x460 mm	
28,2 / 26,8 kg	

STANDARD CONFIGURATION

Part number	Description
99815044KA	COMPACT EVO 306HF · H ₂ O
99815044A	Power source
99490034K	Cooler unit SMART 400V + tank CL 500 · 5 kg
99900282	Trolley · 4 wheels UNI