


# COMPACT EVO 416HF



## FEATURES

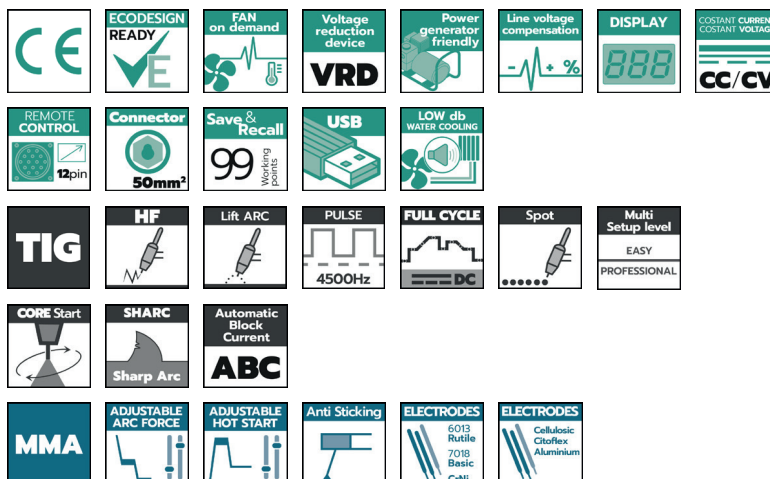

## TECHNICAL DATA

Input Voltage
Power 60%
No load voltage $U_0$
Amp Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

## COMPACT EVO 416HF

400V ± 10% · 50/60 Hz · (3ph)	
<b>TIG</b>	<b>MMA</b>
13,8 KVA	14,7 KVA
10 V	75 V
5 ÷ 400 A	5 ÷ 350 A
400A @ 50% 300A @ 100%	350A @ 50% 270A @ 100%
H	
IP 22S	
255x530x460 mm	
33,2 / 31,4 kg	

## STANDARD CONFIGURATION

99815045KA	COMPACT EVO 416HF · H <sub>2</sub> O
99815045A	Power source
99490034K	Cooler unit SMART 400V + tank CL 500 · 5 kg
99900282	Trolley · 4 wheels UNI