


## SPARC 120



## FEATURES

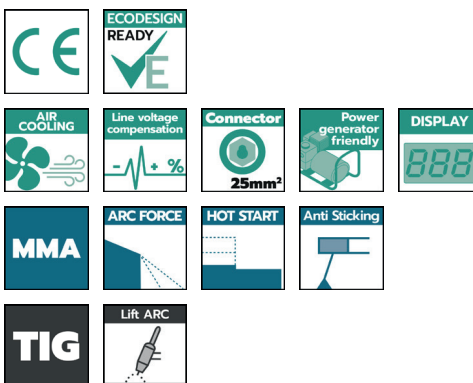

## TECHNICAL DATA

Input Voltage
Power 60%
U <sub>o</sub>
Amp. min-max
Duty Cycle 40°C
Ø Electrode
Electrode Type
Insulation
Protection degree
Dimens. (LxWxH)
Weight box/net

## SPARC 120

(1ph) 230V ± 10% · 50/60Hz
4,0 KVA
60 V
10 ÷ 120 A
120A @ 25%
80A @ 60%
60A @ 100%
1,6 ÷ 3,25 mm
6013 - 7018
H
IP22S
120 x 300 x 260 mm
3,8 Kg

## STANDARD CONFIGURATION

Part number	Description	
<b>99806021</b>	<b>SPARC 120 · CARTON BOX KIT</b>	230 x 360 x 280 mm · 6,0 Kg
-	Power source · Sparc 120	
43210255	Ground cable with clamp · 10mm <sup>2</sup> · 1,6 m · connector 25 mm <sup>2</sup>	
43205127	Welding cable · 10mm <sup>2</sup> · 2,4 m · connector 25 mm <sup>2</sup>	
21905039	Hammer-brush	
77005237	Carton box	

<b>99806024</b>	<b>SPARC 120 · ANTI-SHOCK CASE KIT</b>	160 x 400 x 475 mm · 7,6 Kg
-	Power source · Sparc 120	
43210255	Ground cable with clamp · 10mm <sup>2</sup> · 1,6 m · connector 25 mm <sup>2</sup>	
43205127	Welding cable · 10mm <sup>2</sup> · 2,4 m · connector 25 mm <sup>2</sup>	
21905039	Hammer-brush	
21690996	Anti-shock case	