


## SPARC 200



## FEATURES

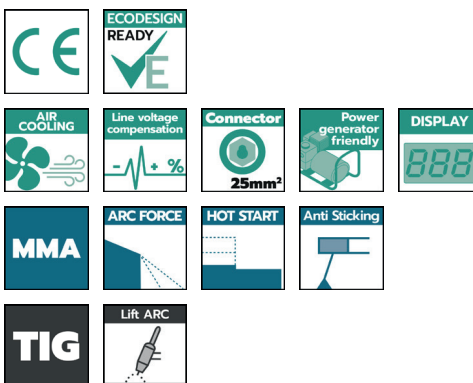

## TECHNICAL DATA

Input Voltage
Power 60%
U <sub>o</sub>
Amp. min-max
Duty Cycle 40°C
Ø Electrode
Electrode Type
Insulation
Protection degree
Dimens. (LxWxH)
Weight box/net

## SPARC 200

(1ph) 230V ± 10% · 50/60Hz
6,7 KVA
70 V
10 ÷ 200 A
200A @ 25%
130A @ 60%
100A @ 100%
1,6 ÷ 4,0 mm
6013 - 7018
H
IP22S
120 x 300 x 260 mm
4,4 Kg

## STANDARD CONFIGURATION

Part number	Description	
<b>99806023</b>	<b>SPARC 200 · CARTON BOX KIT</b>	230 x 360 x 280 mm · 7,2 Kg
-	Power source · Sparc 200	
43210256	Ground cable with clamp · 16 mm <sup>2</sup> · 2,0 m · connector 25 mm <sup>2</sup>	
43205128	Welding cable · 16 mm <sup>2</sup> · 3,0 m · connector 25 mm <sup>2</sup>	
21905039	Hammer-brush	
77005237	Carton box	
<b>99806026</b>	<b>SPARC 200 · ANTI-SHOCK CASE KIT</b>	160 x 400 x 475 mm · 8,8 Kg
-	Power source · Sparc 200	
43210256	Ground cable with clamp · 16 mm <sup>2</sup> · 2,0 m · connector 25 mm <sup>2</sup>	
43205128	Welding cable · 16 mm <sup>2</sup> · 3,0 m · connector 25 mm <sup>2</sup>	
21905039	Hammer-brush	
21690996	Anti-shock case	