


## GALILEO TIG 211 EASY AC/DC



## FEATURES

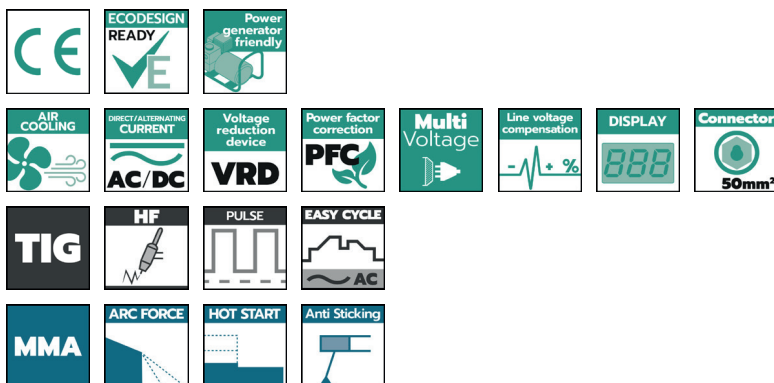

## TECHNICAL DATA

Input Voltage
Power 60%
U <sub>0</sub>
Amp. min-max
Duty Cycle 40°C
∅ Electrode
Electrode Type
Insulation
Protection degree
Dimens. (LxWxH)
Box (LxWxH)
Weight box/net

## GALILEO TIG 211 EASY AC/DC

(1ph) 110V ± 10% · 50/60Hz			(1ph) 230V ± 10% · 50/60Hz		
TIG		MMA	TIG		MMA
DC	AC	DC	DC	AC	DC
2 KW	2 KW	2,2 KW	2,3 KW	2,5 KW	4 KW
45 V	45 V	45 V	45 V	45 V	45 V
5 ÷ 140 A	10 ÷ 140 A	5 ÷ 100 A	5 ÷ 200 A	10 ÷ 200 A	5 ÷ 170 A
140A 40%	140A 40%	100A 35%	200A 25%	200A 30%	170A 30%
110A 60%	110A 60%	75A 60%	130A 60%	140A 60%	120A 60%
85A 100%	85A 100%	60A 100%	100A 100%	110A 100%	90A 100%
-	-	1,6 ÷ 2,5 mm	-	-	1,6 ÷ 5 mm
-	-	6013 - 7018	-	-	6013 - 7018
H					
IP23S					
195x490x395 mm					
300x640x455 mm					
12,0 / 11,2 Kg					

## STANDARD CONFIGURATION

Part number	Description
99806020	GALILEO TIG 211 EASY AC/DC
99806020K	GALILEO TIG 211 EASY AC/DC + KIT <span style="float: right;">340x630x460 mm · 21,2 / 19,6 Kg</span>
99806020	Power source · Galileo TIG 211 Easy AC/DC
23020410	TIG torch · Tig 26 · 4 m · 50 mm <sup>2</sup> · 12 pins
43210170	Ground cable · 25 mm <sup>2</sup> · 2 m · conn. 50 mm <sup>2</sup>
30900030	Gas hose KIT · 2 m