


FOX 165



FEATURES

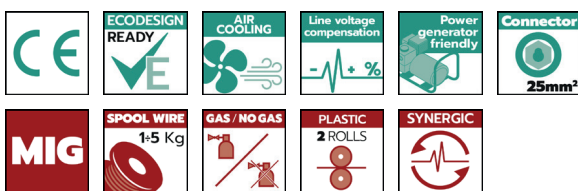

TECHNICAL DATA

Input Voltage
Power 60%

U ₀
Amp. min-max
Duty Cycle 40°C
Steel
Flux Core
Ø Electrode
Electrode type
Insulation
Protection degree
Dimens. (LxWxH)
Box (LxWxH)
Weight box/net

FOX 165

(1ph) 230V ± 10% · 50/60Hz	
1,9 KW	
MIG	MMA
70 V	70 V
25 ÷ 150 A	20 ÷ 150 A
150A @ 25% 95A @ 60% 75A @ 100%	150A @ 20% 85A @ 60% 65A @ 100%
0,8 Ø mm	-
0,9 Ø mm	-
-	1,6 ÷ 3,25 Ø mm
-	6013 - 7018 - CrNi
H	
IP22S	
220x480x385 mm	
260x590x435 mm	
12,0 / 10,5 Kg	

STANDARD CONFIGURATION

Part number	Description
99820050	FOX 165
23000132	MIG torch · 10 mm ² · 2,7 m
-	Ground cable · 16 mm ² · 2 m
21910116	Flux core wire reel · 0,5 Kg · Ø 0,9 mm
33805074	Drive roll · Ø 25 mm · 0,6 ÷ 0,8/0,9 mm Knurled
30900030	Gas hose KIT · 2 m