


FOX 191



FEATURES

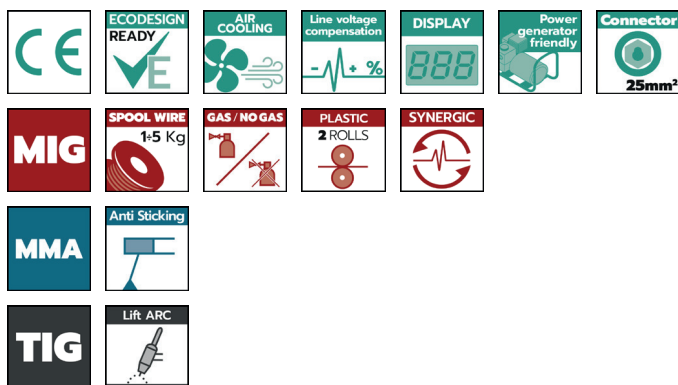

TECHNICAL DATA

		FOX 191		
Input Voltage		(1ph) 230V ± 10% · 50/60Hz		
		MIG	MMA	TIG
Power 60%		2,4 KW	2,8 KW	2,8 KW
U _o		70 V	70 V	70 V
Amp. min-max		25 ÷ 180 A	20 ÷ 180 A	5 ÷ 180 A
Duty Cycle 40°C		180A @ 20% 105A @ 60% 75A @ 100%	180A @ 20% 105A @ 60% 75A @ 100%	200A 35% 150A 60% 120A 100%
Steel		0,6 ÷ 1,0 Ø mm	-	-
Stainless steel		0,8 ÷ 1,0 Ø mm	-	-
Aluminium		0,8 ÷ 1,0 Ø mm	-	-
Flux Core		0,9 Ø mm	-	-
Ø Electrode		-	1,6 ÷ 4,0 Ø mm	-
Electrode type		-	6013 - 7018 - CrNi	-
Insulation		H		
Protection degree		IP22S		
Dimens. (LxWxH)		220x480x385 mm		
Box (LxWxH)		260x590x435 mm		
Weight box/net		12,5 / 10,5 Kg		

STANDARD CONFIGURATION

Part number	Description
99820052	FOX 191
23000491	MIG torch 15 · Euro connection · 3 m
43210138K	Ground cable · 16 mm ² · 2 m
21910116	Flux core wire reel · 0,5 Kg · Ø 0,9 mm
33805023	Drive roll · Ø 30 mm · 0,6 ÷ 0,8/0,9 mm
30900030	Gas hose KIT · 2 m

OPTIONAL

Part number	Description
99900171A	Trolley
23020173	TIG torch · Tig 17V · 4 m · with gas valve
43205028K	MMA welding cable · 16 mm ² · 3 m