


FOX 211



FEATURES

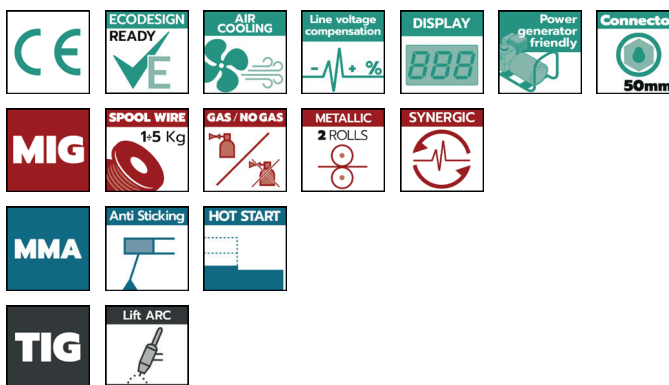

TECHNICAL DATA

Input Voltage	
Power 60%	
U_o	
Amp. min-max	
Duty Cycle 40°C	
Steel	
Stainless steel	
Aluminium	
Flux Core	
CuSi ₃	
Ø Electrode	
Electrode type	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Box (LxWxH)	
Weight box/net	

FOX 211

(1ph) 230V ± 10% · 50/60Hz		
5,5 KVA		
MIG	MMA	TIG
35 V	65 V	65 V
20 ÷ 200 A	5 ÷ 200 A	5 ÷ 200 A
200A @ 35% 160A @ 60% 140A @ 100%	200A @ 35% 150A @ 60% 120A @ 100%	200A @ 35% 150A @ 60% 120A @ 100%
0,6 ÷ 1,0 Ø mm	-	-
0,8 Ø mm	-	-
0,8 ÷ 1,0 Ø mm	-	-
0,9 Ø mm	-	-
0,8 Ø mm	-	-
-	1,6 ÷ 5,0 Ø mm	-
-	6013 - 7018 - CrNi	-
H		
IP22S		
220x520x385 mm		
260x640x435 mm		
23 / 19 Kg		

STANDARD CONFIGURATION

Part number	Description
99820053A	FOX 211
23000494	MIG torch ErgoPlus 25 · Euro connection · 3 m
43210132K	Ground cable · 25 mm ² · 3 m
33805101	Drive roll · Ø 30 mm · 0,8 ÷ 1,0 mm
30900030	Gas hose KIT · 2 m

OPTIONAL

Part number	Description
99900171A	Trolley
23020199	TIG torch · Tig 26V · 4 m
43205049K	MMA welding cable · 16 mm ² · 3 m