


PUMA 256



FEATURES

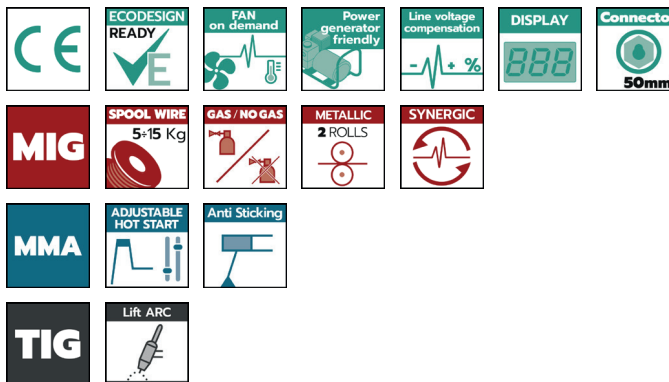

TECHNICAL DATA

Input Voltage	
Power 60%	
U_o	
Amp. min-max	
Duty Cycle 40°C	
Steel	
Stainless steel	
Aluminium	
Flux Core	
CuSi ₃	
Ø Electrode	
Electrode type	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Box (LxWxH)	
Weight box/net	

PUMA 256

(1ph) 230V ± 10% · 50/60Hz		
5,6 kW		
MIG	MMA	TIG
30 V	56 V	10 V
30 ÷ 250 A	20 ÷ 200 A	10 ÷ 250 A
250 A @ 30%	200 A @ 30%	250 A @ 30%
190 A @ 60%	170 A @ 60%	190 A @ 60%
170 A @ 100%	150 A @ 100%	170 A @ 100%
	0,8 ÷ 1,0 Ø mm	
	0,8 ÷ 1,0 Ø mm	
	1,0 ÷ 1,2 Ø mm	
	1,0 ÷ 1,2 Ø mm	
	0,8 Ø mm	
	1,6 ÷ 4 Ø mm	
	6013 rutile - 7018 basic	
	H	
	IP23S	
	450x840x710 mm	
	365x895x650 mm	
	32 / 30 Kg	

STANDARD CONFIGURATION

Part number	Description
99820061	PUMA 256
99820061K	PUMA 256 + KIT
99820061	Power source · Puma 256 (no accessories)
23000494	MIG Torch MIG 25 · Euro connection · 3 m
43210253	Ground cable · 25 mm ² · 3 m
33805101	Drive roll · Ø 30 mm · 0,8 ÷ 1,0 mm
22905049	Pressure regulator · mini CO ₂ /Argon · 2 manometers
22910014	Adaptor for gas bottle

OPTIONAL

Part number	Description
23020199	TIG Torch · Tig 26V · 4 m