


COMPACT EVO 300 AC/DC

FEATURES

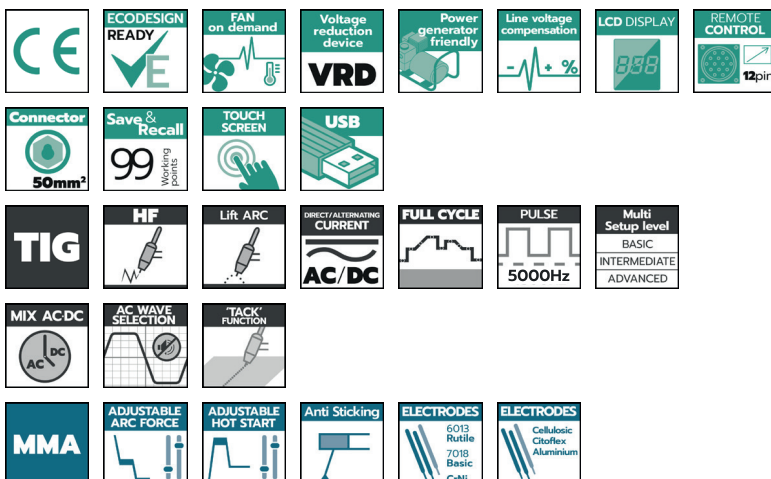

TECHNICAL DATA

| |
|-----------------------|
| Input Voltage |
| Power 60% |
| No load voltage U_0 |
| Amp Min-Max |
| Duty Cycle 40° |
| Insulation class |
| Protection degree |
| Dimensions (LxWxH) |
| Weight box/net |

COMPACT EVO 300 AC/DC

| | |
|-------------------------------|-------------|
| 400V ± 10% · 50/60 Hz · (3ph) | |
| TIG | MMA |
| 9,2 KVA | 9,2 KVA |
| 55 V | 55 V |
| 5 ÷ 300 A | 5 ÷ 300 A |
| 300A @ 30% | 300A @ 30% |
| 200A @ 100% | 200A @ 100% |
| H | |
| IP 22S | |
| 255x530x460 mm | |
| 33,5 / 32,0 kg | |

STANDARD CONFIGURATION

| Part number | Description |
|-------------|---|
| 99815048K | COMPACT EVO AC/DC 300 · H ₂ O |
| 99815048 | Power source |
| 99490036K | Cooler unit SMART 400V + tank CL 500 · 5 kg |
| 99900282 | Trolley · 4 wheels UNI |