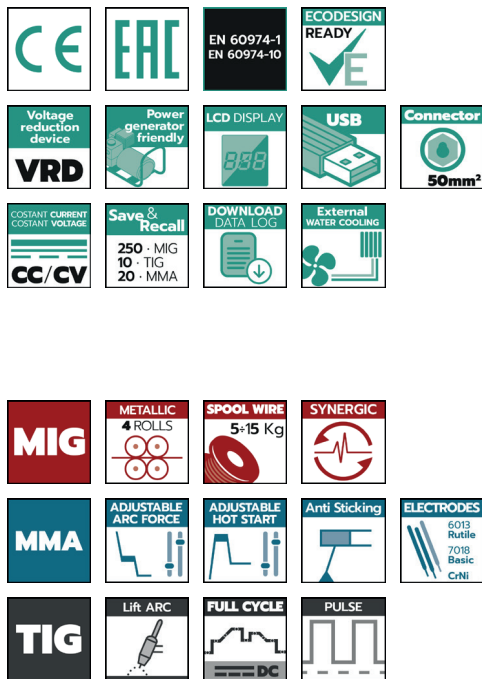


**MAXITECH EVO 356C · H<sub>2</sub>O**

**FEATURES**

**TECHNICAL DATA**

Input Voltage	
Power 60%	
U <sub>o</sub>	
Amp. min-max	
Duty Cycle 40°C	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Weight box/net	

**MAXITECH EVO 356C · H<sub>2</sub>O**

	(3ph) 400V ± 10% · 50/60Hz		
	13,9 KVA		
	MIG	MMA	TIG
	60 V	60 V	12 V
	30 ÷ 350A	10 ÷ 350 A	5 ÷ 350 A
	350A @ 50% 280A @ 100%	350A @ 50% 280A @ 100%	350A @ 50% 280A @ 100%
	H		
	IP 23S		
	Power source	320x650x500 mm	
	Cooler unit	315x630x235 mm	
	Trolley	450x1000x1110 mm	
	69,0 / 65,5 kg		

**STANDARD CONFIGURATION**

Part number	Description	
99825022K	MAXITECH EVO 356C · H <sub>2</sub> O	
99825006A	Power source	INCLUDED
04600452	Software expansion card · Pulse + Double pulse	
04600492	Enablement card · Up-Down torches · Analogic/Digital signal	
99490024KA	Cooler unit XL + tank CL 500 · 5 kg	
33805005	Drive roll · Ø 30 mm · 1,0 - 1,2 mm	
33805003	Drive roll · Ø 30 mm · 0,6 - 0,8 mm	
99900201	Trolley · 4 wheels HD	