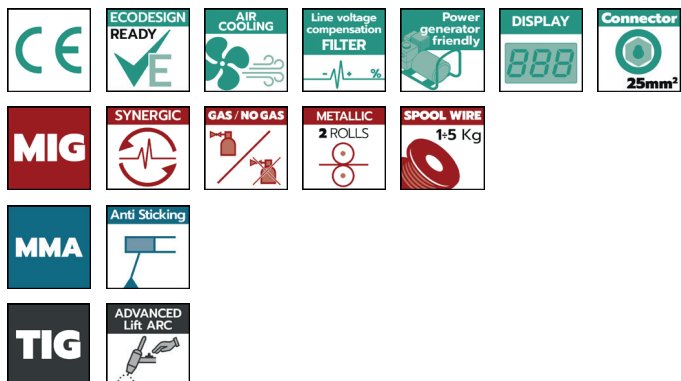


TP 190 EVO
FEATURES

TECHNICAL DATA

Input Voltage
Power 60%
No load voltage U_0
Amp Min-Max
Duty Cycle 40°
Insulation class
Protection degree
Dimensions (LxWxH)
Weight box/net

TP 190 EVO		
(1ph) · 230V ± 10% · 50/60 Hz		
MIG	MMA	TIG
6,1 KVA	6,1 KVA	6,1 KVA
70 V	70 V	70 V
25 ÷ 180 A	20 ÷ 180 A	10 ÷ 180 A
180A @ 30%	180A @ 20%	180A @ 30%
105A @ 60%	105A @ 60%	105A @ 60%
75A @ 100%	75A @ 100%	75A @ 100%
H		
IP 22S		
230x400x400 mm		
14,8 kg		

STANDARD CONFIGURATION

Part number	Description
99820063	TP 190 EVO
33805003	Drive roll · Ø 30 mm · 0,6 - 0,8 mm

Part number	Description
99820063K	TP 190 EVO + ACCESSORIES KIT
99820063	Power source
33805003	Drive roll · Ø 30 mm · 0,6 - 0,8 mm
04600708	Kit accessori per TP 190 EVO
23000494	Torch ERGOPLUS 25 · 3 mt · Air
43210132	Ground cable with clamp · 25 mm² · 3 mt · conn. 50 mm²
23005038	M6 Contact tip · Ø 0,8 mm
23005039	M6 Contact tip · Ø 1,0 mm
23005070	M6 Contact tip · Ø 0,6 mm
33805101	Drive roll · Ø 0,8 - 1,0 mm