


PUMA 278



FEATURES

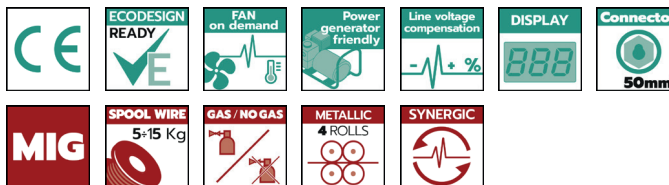

TECHNICAL DATA

Input Voltage	
Power 60%	

U ₀	
Amp. min-max	
Duty Cycle 40°C	
Steel	
Stainless steel	
Aluminium	
Flux Core	
CuSi ₃	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Box (LxWxH)	
Weight box/net	

PUMA 278

	(3ph) 400V ± 10% · 50/60Hz
	4,8 KW
MIG	
	30 V
	30 ÷ 250A
	250A @ 30%
	190A @ 60%
	150A @ 100%
	0,8 ÷ 1,0 Ø mm
	0,8 ÷ 1,0 Ø mm
	1,0 ÷ 1,2 Ø mm
	1,0 ÷ 1,2 Ø mm
	0,8 Ø mm
	H
	IP23S
	450x840x710 mm
	365x895x650 mm
	32 / 30 Kg

STANDARD CONFIGURATION

Part number	Description
99825017A	PUMA 278
99825017KA	PUMA 278 + KIT
99825017A	Power source · Puma 278 (no accessories)
23000494	MIG Torch 25 · Euro Connection · 3 m
43210253	Ground cable · 25 mm ² · 3 m
33805101	Drive roll · Ø 30 mm · 0,8 ÷ 1,0 mm
22905049	Pressure regulator · mini CO ₂ /Argon · 2 manometers
22910014	Adaptor for gas bottle